

W32L100-MRA1FP

32" 4K UHD Marine Display



KEY FEATURES

- 32" 3840 x 2160 resolution with projective capacitive multi-touch screen
- Edge to edge narrow bezel design and fanless cooling system
- OSD Key For quick mode changing between ECDIS DAY, DUSK, and NIGHT mode
- 9~36 V DC to DC power input acceptable (Isolation Resistance)
- Meet the requirements of industrial marine standards, compatible with IEC60945 4th Edition, DNVGLCG0339, IACS E10
- Color calibrated for ECDIS compliance (Optional)

INTRODUCTION

The Winmate 4K Marine Display Series comes in sizes from 27" to 55". It offers a clear 3840 x 2160 resolution, and the projective capacitive multi-touch screen enables precise navigation and control. These displays feature narrow bezels and a fanless cooling system for a sleek look and efficient thermal performance. Certified with IEC60945 4th, IACS E10, and DNV-CG-0339, ensuring durability and reliability in maritime environments. With OSD keys for quick switching between ECDIS DAY, DUSK, and NIGHT modes, along with optional color calibration for ECDIS compliance, the series performs well in demanding marine settings. Its wide 9 to 36 V DC input range further enhances suitability for navigation and control applications.

SPECIFICATIONS

Display			
Resolution	3840x2160	Size	32.0 inches
Contrast Ratio	1000:1	Panel Brightness	350.0 nits
Display Color	1.07B Colors	View Angles	89,89,89,89
Active Area	708.48x398.52 mm	Touch / Glass	Projected Capacitive Multi Touch Screen (AR Coating) (Default) AG film (Optional) AR Glass (Optional)
Environment			
Operating Humidity	5% to 95%	Operating Temperature	-15~55°C
Shock	15G,11ms duration	Vibration	0.7g@DNV-CG-0339 (Class A)
IP rating	IP66 (Front Side)		
Certification			
Certification	CE, FCC DNV-CG-0339, IEC60945 4th, IACS E10		
IO Ports			
USB Port	1 x USB for Touch Screen	Serial Port	1 x RS232 for remote control
Video	1 x VGA 1 x DVI-D	Buzzer	75 dB~80 dB, 2300 Hz, 1m

	2 x HDMI 2.0 1 x DP	
--	------------------------	--

Mechanical

Dimension	795 x 524 x 75.5 mm	Weight	18.5 kg
Mounting	VESA mount/Panel mount	Enclosure	Anodized Aluminum Bezel
Cooling System	Fanless Design	Cut out	770 x 500 mm


Power

Power Rating	24V DC-in with Isolation (Approval by Certificate) 9~36V DC Input Acceptable	Consumption	65W (Typical)
--------------	---	-------------	---------------

Accessory

Accessory	User Manual AC to DC Adapter Power Cord 3 Pin Terminal Block 1 x VGA cable 1 x DVI cable 1 x DP cable 2 x HDMI cable 1 x RS232 cable 1 x USB cable	
-----------	---	--

DIMENSIONS UNIT:MM

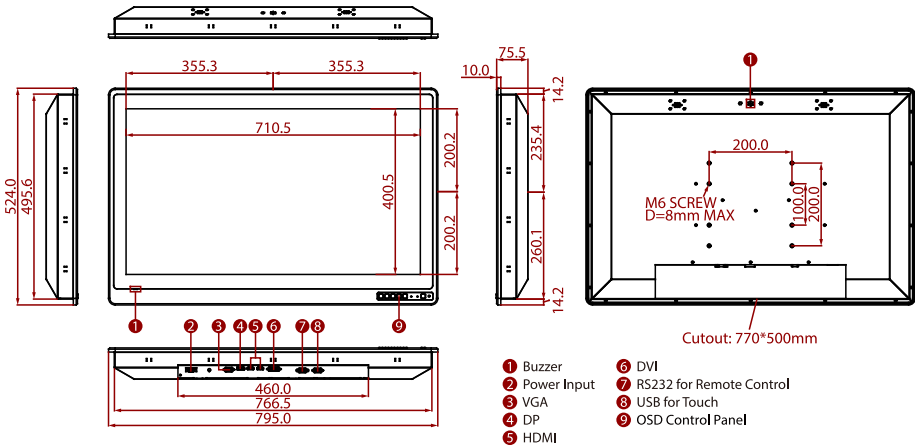

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.